

1276/1277/1376/1377 Series

Features

◆ 1276 Connector

Available in 2 through 50 circuits
Glass filled polyester UL94V-0
Accepts 0.46 (.018") square pin
Mates with Leoco 1271 Header

◆ 1277 Connector


Available in 2 through 50 circuits
Glass filled polyester UL94V-0
Accepts 0.46(.018") square pin
Mates with Leoco 1271 Header

◆ 1376 Connector

Available in 4 through 100 circuits
Glass filled polyester UL94V-0
Accepts 0.46(.018") square pin
Plating options are available
Contact: Phosphor bronze
Mates with Leoco 1371 Header

◆ 1377 Connector

Available in 4 through 100 circuits
Glass filled polyester UL94V-0
Accepts 0.46(.018") square pin
Plating options are available
Contact: Phosphor bronze
Mates with Leoco 1371 Header



Specifications

- ◆ Current rating: 1.0A AC,DC
- ◆ Voltage rating: 250V AC,DC
- ◆ Temperature rating: -25°C ~ +105°C
- ◆ Contact resistance: 20mΩ max.
- ◆ Insulation resistance: 1,000MΩ min.
- ◆ Withstanding voltage: 500V AC /minute
- ◆ Applicable PC board thickness: 1.6mm

Standards

 Recognized No. E82349(1276,1277)

Ordering Information:

1276S $\frac{**}{1} \frac{*}{2}$ 000

1.No. of circuits

2.Plating:

T= Tin plated 120 u" min. over 30~50 u" nickel overall



U= Gold flash over 30~50 u" nickel overall

W= 15 u" gold over 30~50 u" nickel overall



Z= 30 u" gold over 30~50 u" nickel overall

A=1.27mm(.050")*No. of spaces

B=A+1.27mm(.050")



RECOMMENDED HOLE PATTERN

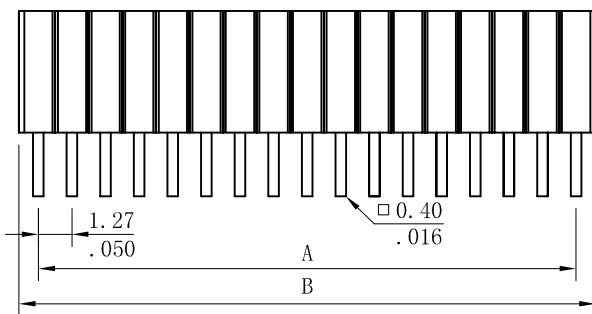

Ordering Information:

1376S $\frac{***}{1} \frac{*}{2}$ 00

1.No. of circuits

2.Plating:

T= Tin plated 120 u" min. over 30~50 u" nickel overall



U= Gold flash over 30~50 u" nickel overall

W= 15 u" gold over 30~50 u" nickel overall



Z= 30 u" gold over 30~50 u" nickel overall

A=1.27mm(.050")*No. of spaces

B=A+1.27mm(.050")

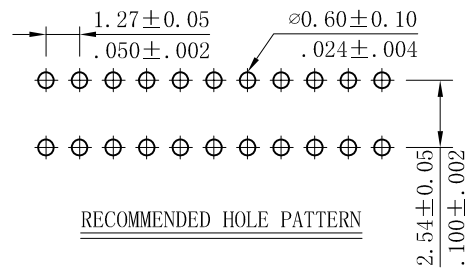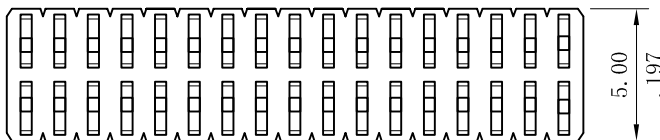

RECOMMENDED HOLE PATTERN

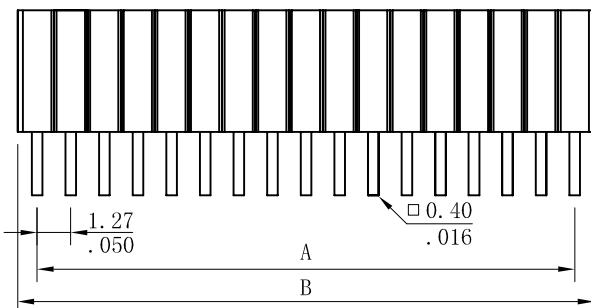

Ordering Information:

1277S $\frac{**}{1} \frac{*}{2}$ 000

1.No. of circuits

2.Plating:

T=Tin plated 120 u" min. over 30~50 u" nickel overall


U=Gold flash over 30~50 u" nickel overall

W=15 u" gold over 30~50 u" nickel overall

Z=30 u" gold over 30~50 u" nickel overall

A=1.27mm(.050")*No. of spaces

B=A+1.27mm(.050")

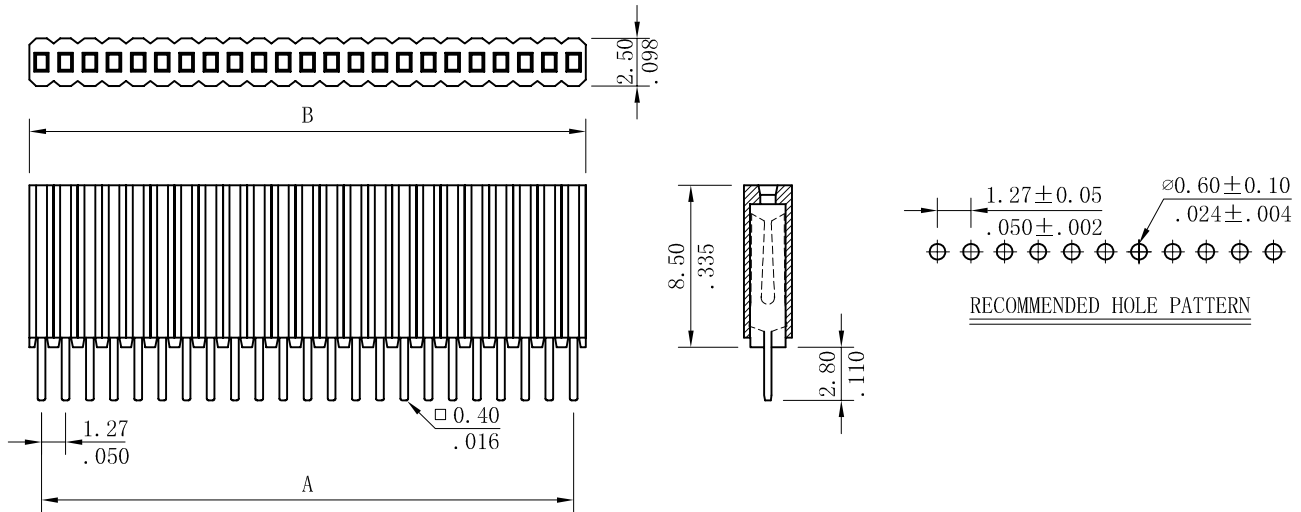

Ordering Information:

1377S $\frac{***}{1} \frac{*}{2}$ 00

1.No. of circuits

2.Plating:

T=Tin plated 120 u" min. over 30~50 u" nickel overall

U=Gold flash over 30~50 u" nickel overall

A=1.27mm(.050")*No. of spaces

B=A+1.27mm(.050")

