


2015 Series

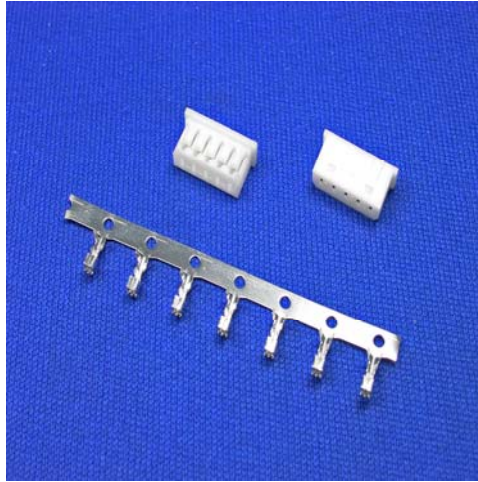

Features

◆ 2015 Housing:

Available in 2 through 15 circuits

Polarized with locking ribs

Insulator : PBT UL94V-0

Accepts Leoco 2015 crimp terminal

◆ 2015 Terminal:

Accommodate wire range AWG 24~28

Use in Leoco 2015 series socket

Material: Phosphor bronze

Plating : Tin

Specifications

◆ Current rating: 2A AC,DC

◆ Voltage rating: 125V AC,DC

◆ Temperature rating:-20°C to +85°C

◆ Contact Resistance: 20mΩ Max.


◆ Insulation Resistance: 1,000MΩ Min.

◆ Withstanding Voltage: 800V AC/minute

Ordering Information:

2015S $\frac{**}{1}$ 0000

1.No. of Circuits

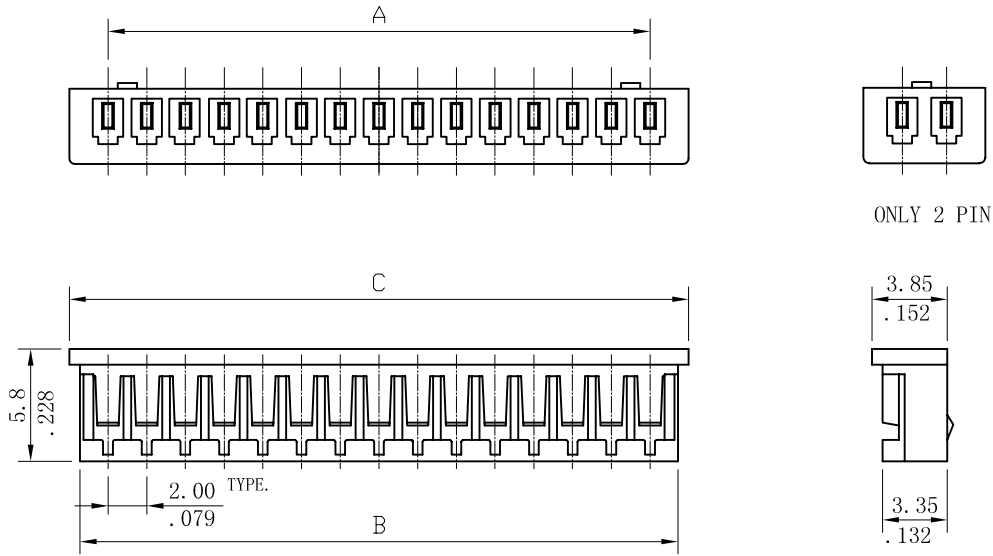

$$A = 2.0\text{mm} (.079\text{'}) \times \text{No. of spaces}$$

$$B = 2.0\text{mm} (.079\text{'}) \times \text{circuits} + 0.90\text{mm} (.035\text{'})$$

$$C = 2.0\text{mm} (.079\text{'}) \times \text{circuits} + 2.0\text{mm} (.079\text{'})$$

Ordering Information:

2015TPB0000

Material: Phosphor Bronze

Wire Range: AWG 24 ~ 28

Reel Q`ty: 10,000pcs

