

## 2045 Series

### Features

#### 2045 Connector

- ◆ Available in 6 through 100 circuits  
Insulation: PBT+30%Glass Fiber, UL94V-0
- ◆ Mates with Leoco 2046 straight or right angle version shrouded headers

### Specifications

- ◆ Current rating: 1.0A AC,DC
- ◆ Voltage rating: 250V AC,DC
- ◆ Temperature rating: -40°C ~ +105°C
- ◆ Contact resistance: 30mΩ max.
- ◆ Insulation resistance: 1,000MΩ min.
- ◆ Withstanding voltage:500V AC /minute

Ordering Information:

2045S  $\frac{**}{1}$   $\frac{U}{2}$  000


A=2.00mm (.079") \*No. of spaces

B=A+1.00mm (.039")

C=A+7.20mm (.283")

1.No. of circuits

2.Plating: U=gold flash over 30~50u" nickell overall

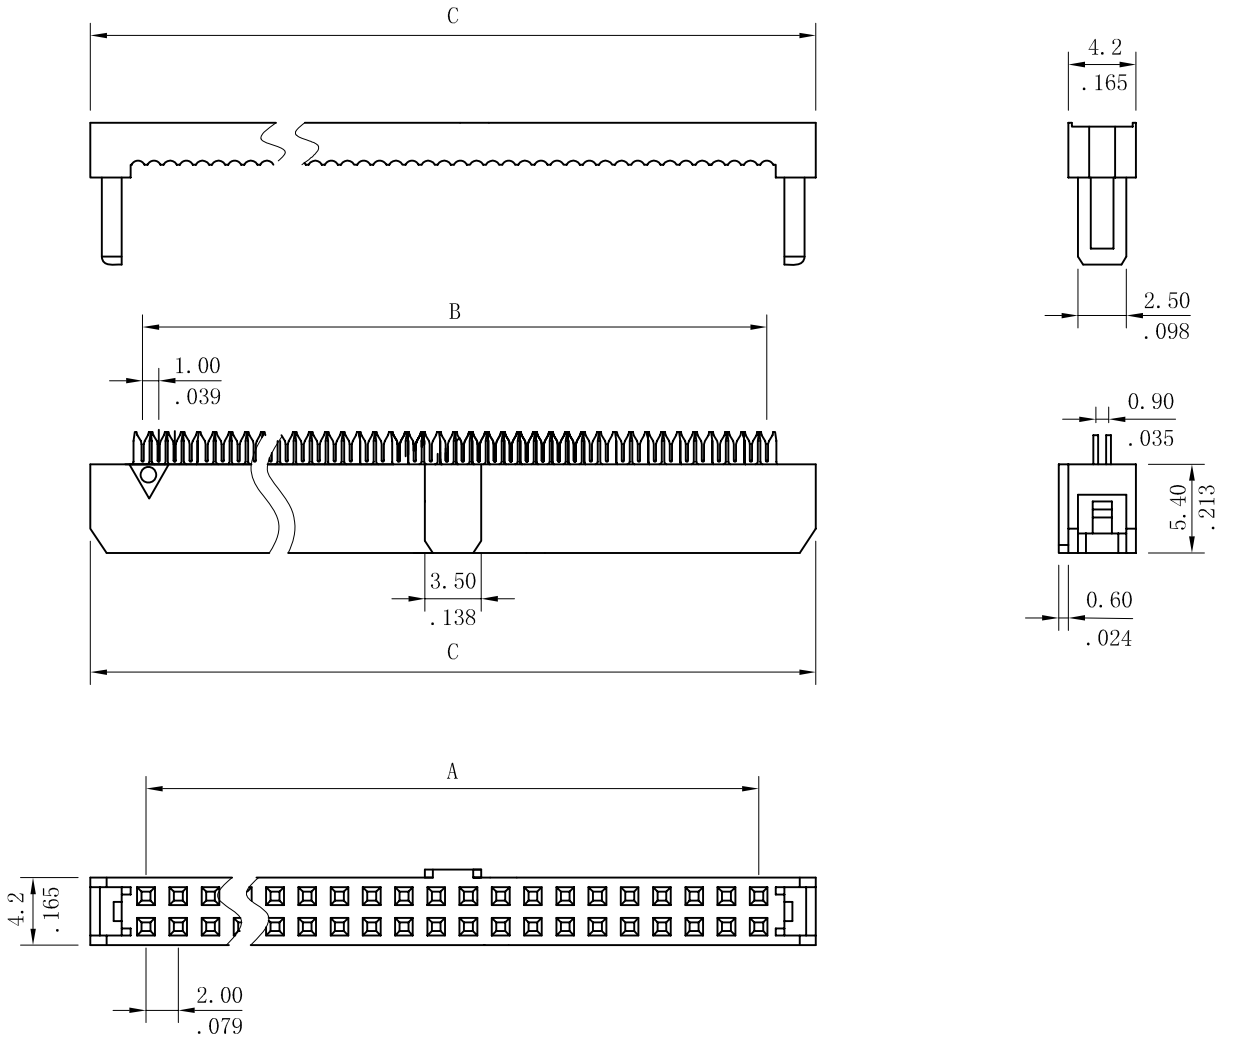

2045S\*\*SR01

