

## 2084 Series

### Features

#### ◆ 2084 Connector


Available in 4 through 80 circuits

Insulation: PA 6T+30%Glass Fiber, UL94V-0

Accepts 0.50(.020" ) square pin

Plating options are available

Mates with Leoco 2028 Header

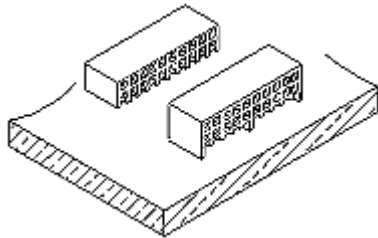

### Specifications

- ◆ Current rating: 1.0A AC,DC
- ◆ Voltage rating: 250V AC,DC
- ◆ Temperature rating: -40°C ~ +105°C
- ◆ Contact resistance: 20mΩ max.
- ◆ Insulation resistance: 1,000MΩ min.
- ◆ Withstanding voltage: 1,000V AC /minute
- ◆ Applicable PC board thickness: 1.6mm

### Standards

 Recognized No. E82349

Ordering Information:

2084 S  $\frac{**}{1}$  H  $\frac{* 00}{2}$

1. No. of Circuits

2. Plating:

T=Tin plated 100 u" over 30~50 u" nickel overall





U=Gold flash over 30~50 u" nickel overall

W=15 u" gold over 30~50 u" nickel overall

Z=30 u" gold over 30~50 u" nickel overall

A=2.00mm(.079")\*No. of spaces

B=A+2.50mm(.098")

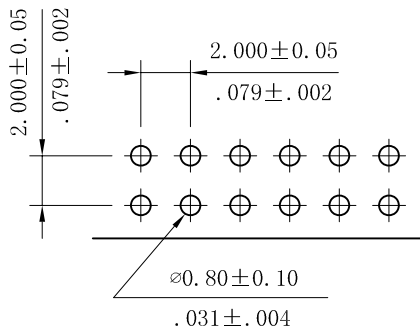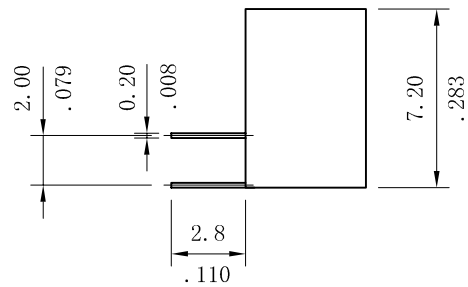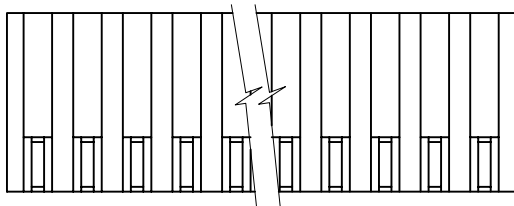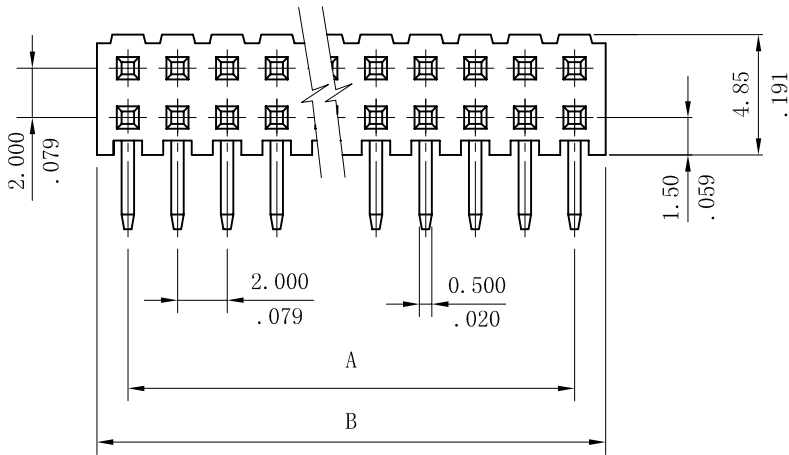

RECOMMENDED HOLE PATTERN