

DHPD/DHSD Series




Features

- ◆ Available in 15,26,44 and 62 circuits
- ◆ Option #4-40 UNC hexagonal standoff or clinch nuts
- ◆ Insulator: Glass filled polyester UL94V-0
- ◆ Color: Black
- ◆ DHPD Contact: Brass
- ◆ DHSD Contact: Phosphor bronze
- ◆ Shell: Steel, tin plated as standard

Ordering Information

DHPD - 15 U C D1
1 2 3 4 5

1. Series No.
2. No. of circuits
3. Contact plating:
 - U = Gold flash over 30~50 μ " nickel overall
 - W = 15 μ " gold over 30~50 μ " nickel overall
 - Z = 30 μ " gold over 30~50 μ " nickel overall
4. Shell plating:
 - C = Tin plated
5. Variations:
 - D1 = Standard with 3.05mm(.012") dia. mount hole
 - D2 = With #4-40 UNC hexagonal standoff
 - T2 = With riveted #4-40 UNC clinch nuts 6mm thickness
 - T4 = With riveted #4-40 UNC clinch nuts 2.5mm thickness

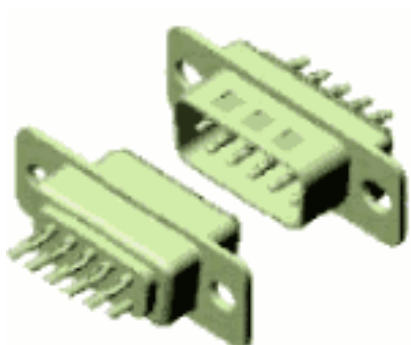

Specifications

- ◆ Current rating: 3A AC,DC
- ◆ Voltage rating: 250V AC,DC
- ◆ Temperature rating: -25°C ~ +105°C
- ◆ Contact resistance: 20m Ω max.
- ◆ Insulation resistance: 5,000M Ω min.
- ◆ Withstanding voltage: 1,000V AC /minute


Standards



Recognized No. E82349(DHSD)



Certified No. LR65731

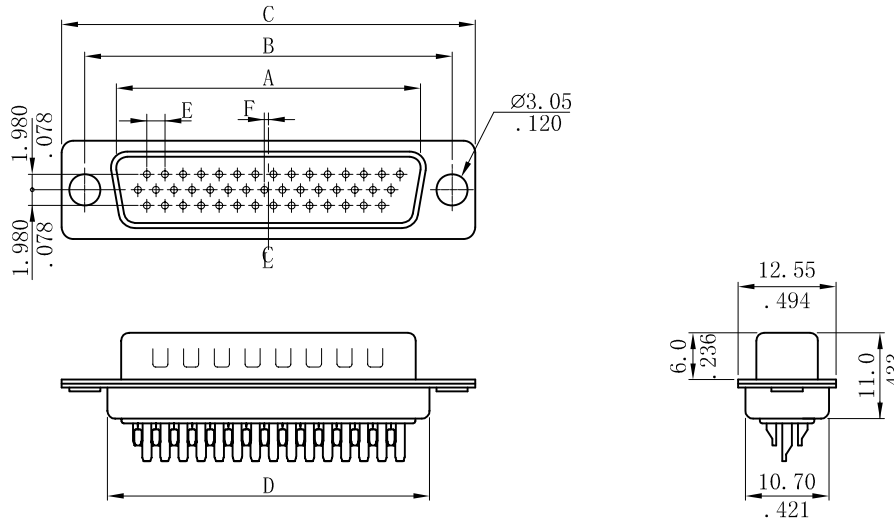


Dimensional & Ordering Information:

Circuits	Dimension					
	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F
15	16.92 (.666)	24.99 (.984)	30.80 (1.213)	19.23 (.757)	2.29 (.090)	0.25 (.010)
26	25.25 (.994)	33.32 (1.312)	39.10 (1.539)	27.56 (1.085)	2.29 (.090)	0.51 (.020)
44	38.96 (1.534)	47.04 (1.852)	53.00 (2.087)	41.28 (1.625)	2.29 (.090)	0.51 (.020)
62	55.42 (2.182)	63.50 (2.500)	69.30 (2.728)	57.73 (2.273)	2.41 (.095)	0.58 (.023)

DHSD

Series Solder Type High Density D-Sub Receptacle

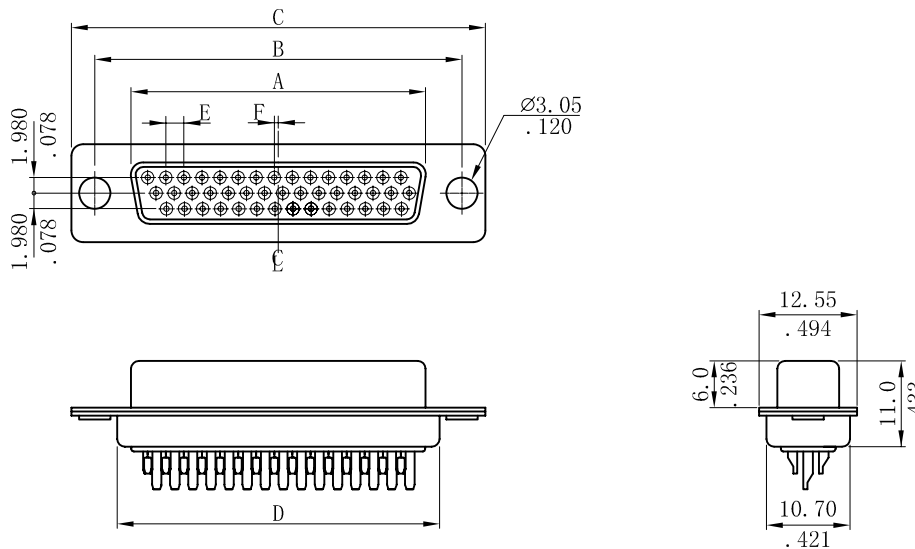

Dimensional & Ordering Information:

Circuits	Dimension					
	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F
15	16.33 (.643)	24.99 (.984)	30.80 (1.213)	19.23 (.757)	2.29 (.090)	0.25 (.010)
26	24.66 (.971)	33.32 (1.312)	39.10 (1.539)	27.56 (1.085)	2.29 (.090)	0.51 (.020)
44	38.38 (1.511)	47.04 (1.852)	53.00 (2.087)	41.28 (1.625)	2.29 (.090)	0.51 (.020)
62	55.84 (2.159)	63.50 (2.500)	69.30 (2.728)	57.73 (2.273)	2.41 (.095)	0.58 (.023)