

DJSL Series

Features

- ◆ Available in 3 through 8 circuits
- ◆ With retaining clip ground strap
- ◆ Options with or without metal shell
- ◆ Material:
Insulator: Glass filled Polyester UL94V-0
Terminal: Phosphor bronze

Specifications

- ◆ Current rating: 2A DC,AC
- ◆ Voltage rating: 100V DC,AC
- ◆ Temperature rating: -25°C ~ +105°C
- ◆ Contact resistance: 20mΩ max.
- ◆ Insulation resistance: 50MΩ min.
- ◆ Withstanding voltage: 500V AC /minute

Standards



 Recognized No. E82349

No of Contact	Part No. With shell	Part No. Without shell
3	DJSL-03TC00	DJSL-03T000
4	DJSL-04TC00	DJSL-04T000
5	DJSL-05TC00	DJSL-05T000
6	DJSL-06TC00	DJSL-06T000
7	DJSL-07TC00	DJSL-07T000
8	DJSL-08TC00	DJSL-08T000

Ordering Information:

$$\frac{\text{DJSL-}}{1} \frac{0*}{2} \frac{T}{3} \frac{*00}{3}$$

1. Series No.
2. No. of Circuits
3. Shell:
C=with shell
0=without shell

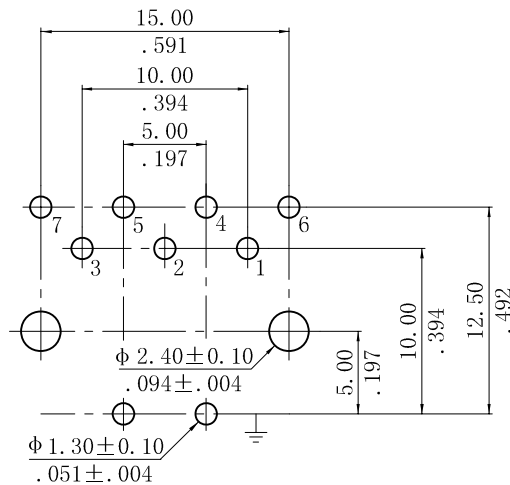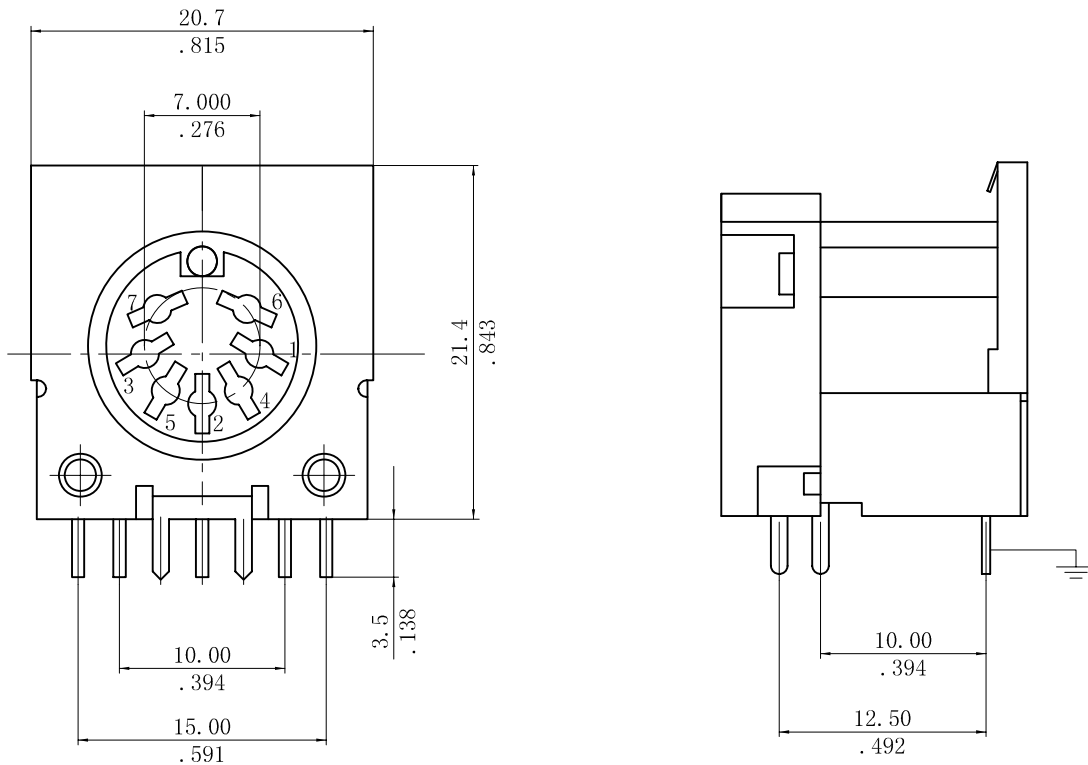

RECOMMENDED HOLE PATTERN