

Features

- ◆ Supporting both Digital & Analog Type
- ◆ Being standard connector for all devices
- ◆ Material:
 - Housing: High Temperature Thermoplastic UL94V-0
 - Contact: Phosphor Bronze, Glod over nickel plated
 - Finish: Tin-Lead Plated
 - Force Shell: Steel Nickel Plated

Ordering Information

DVIS $\frac{D}{1}$ $\frac{L}{2}$ $\frac{*}{3}$ $\frac{R}{4}$ $\frac{*}{5}$ C $\frac{0}{6}$


1. D=Digital(24 Position)
I=Integrated(29 Position)
2. L=Right Angle T Aype
V=Vertical Type
3. Plating:
 - F=Selective gold flash over 30~50u”nickel overall
 - J=15u” Selective gold flash over 30~50u”nickel overall
 - K=30u” Selective gold flash over 30~50u”nickel overall
4. Female Screwlock Variations:
 - R=Riveted whit #4-40 UNC flush insert
without female screwlocks
5. Color:
 - B=Black
 - W=White
 - I=Ivory
6. 0=Standard

Specifications

- ◆ Current rating: 1.5A AC,DC
- ◆ Voltage rating: 40V AC,DC
- ◆ Temperature rating:-20°C to +85°C.
- ◆ Insulation Resistance: 1G M Ω Min.

DVISIT*R*C0 (29 PIN Vertical)

Unit: $\frac{\text{mm}}{\text{inch}}$

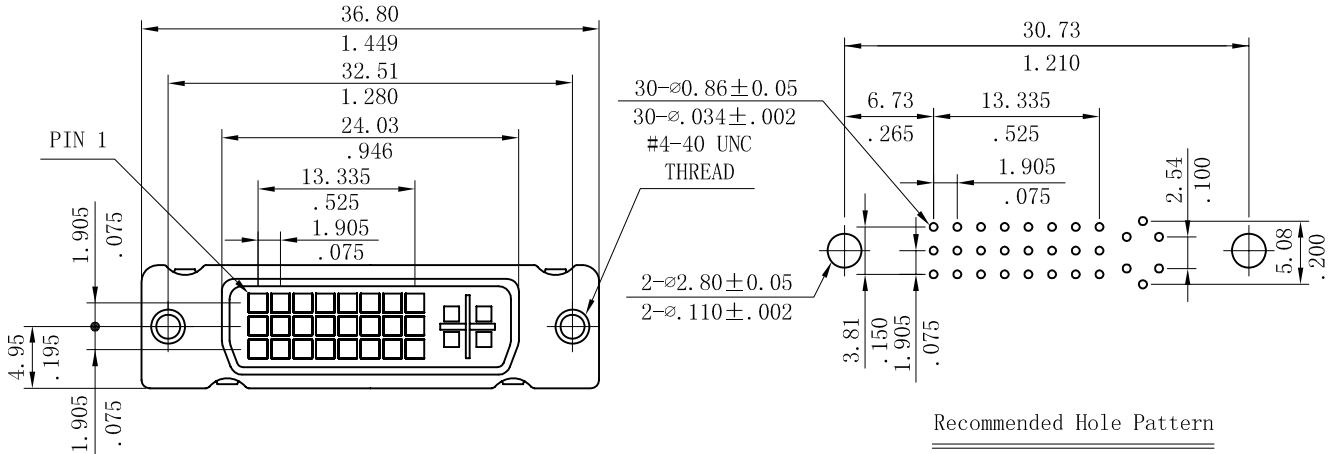

DVISDT*R*C0 (24 PIN Vertical)

