


LCFC Series

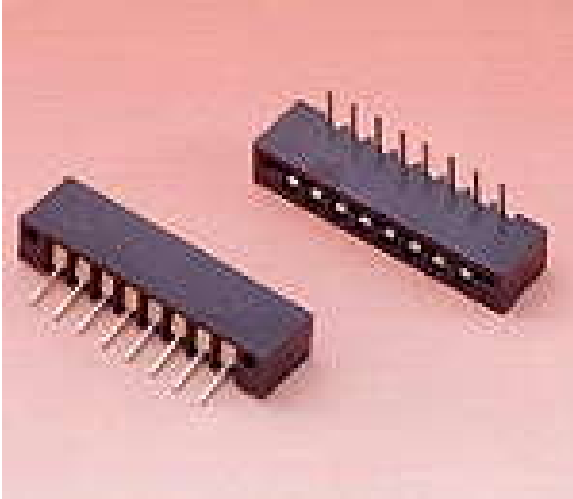

Features

- ◆ Available in 4 through 28 circuits
- ◆ Plating: Tin plated
- ◆ Contact: Phosphor bronze
- ◆ FFC AWG 24 2.54mm pitch
Thickness: 0.15~0.30 mm
- ◆ Applicable P.C. Board thickness: 1.6mm


Ordering Information:

LCFCS 16 * 000
1 2 3 4


- 1.Series No.
- 2.NO. of circuits
- 3.V=Top entry
H=Side entry
- 4.Special options

Specifications





- ◆ Current rating: 1.0A AC,DC
- ◆ Voltage rating: 200V AC,DC
- ◆ Temperature rating:-25°C to +105°C
- ◆ Contact Resistance: 20mΩ Max.
- ◆ Insulation Resistance: 1,000MΩ Min.
- ◆ Withstanding Voltage: 500V AC/minute

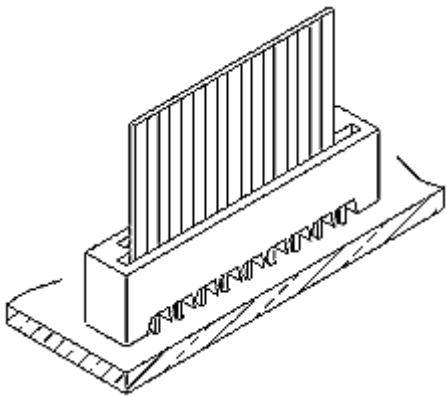

Standards





 Recognized No. E82349

LCFCS**V000

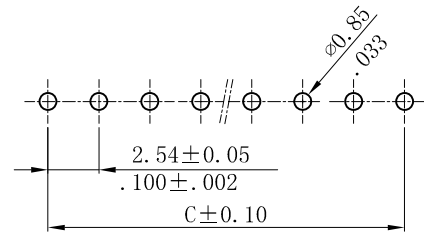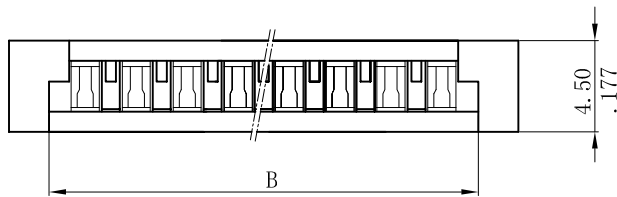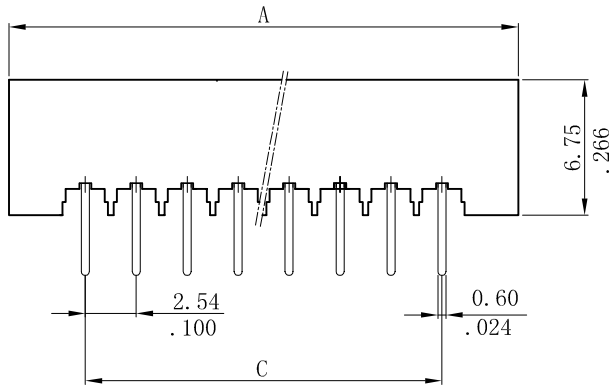

Recommended Hole Pattern

LCFCS**H000

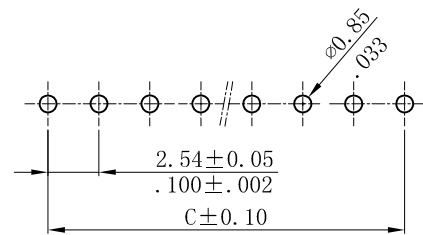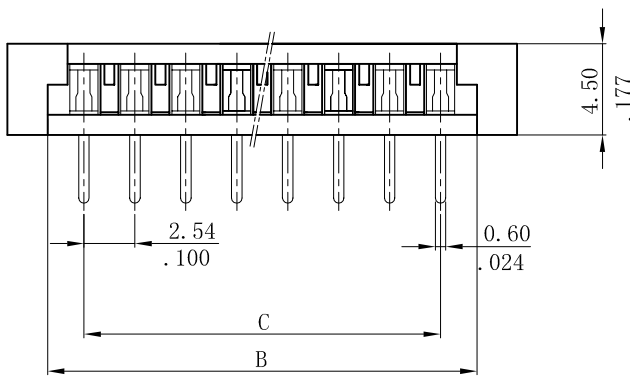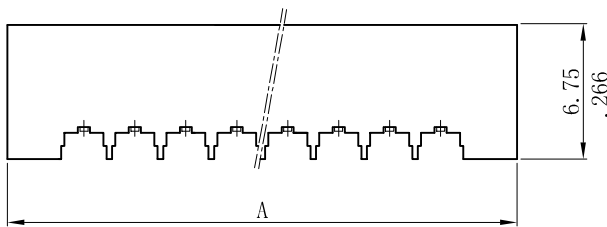

Recommended Hole Pattern

$$A = 2.54\text{mm}(.100\text{'}) * \text{No. of circuits} + 5.48\text{mm}(.216\text{'})$$

$$B = 2.54\text{mm}(.100\text{'}) * \text{No. of circuits} + 3.48\text{mm}(.137\text{'})$$

$$C = 2.54\text{mm}(.100\text{'}) * (\text{No. of circuits} - 1)$$