

SATA Series




Features

- ◆ Available for 7 circuits,15 circuits or “7+15” circuits
- ◆ Plating: Gold plated
- ◆ Contact: Phosphor bronze
- ◆ Applicable in through board or SMT type

Ordering Information

| | | | | | | |
|------------|----------|------------|----------|----------|----------|----------|
| <u>S</u> A | <u>P</u> | <u>0</u> 7 | <u>V</u> | <u>0</u> | <u>0</u> | <u>0</u> |
| 1 | 2 | 3 | 4 | 5 | 6 | |

1. Series No
2. S=Socket
P=Plug
3. No. of circuits
4. Type of the connector
V=Straight Type
H=Right angle Type
M=SMT Type
S=Solder Type
5. Plating
0=Selective gold flash
J=Selective 15u” gold
K= Selective 30u” gold
6. Special description
0=Standard
S=With shell

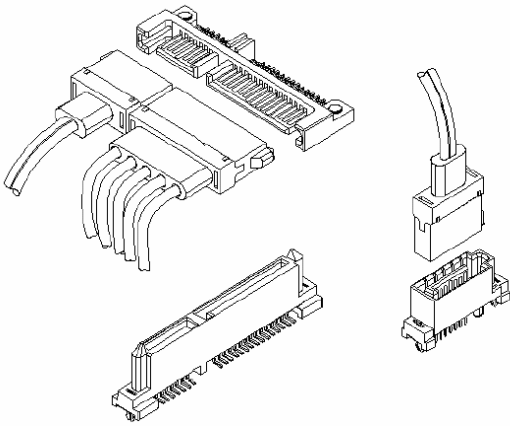

Specifications

- ◆ Current rating: 1.5A AC,DC
- ◆ Voltage rating: 30V AC,DC
- ◆ Temperature rating:-55°C to +105°C
- ◆ Contact Resistance: 30mΩ Max.
- ◆ Insulation Resistance: 500MΩ Min.
- ◆ Withstanding Voltage: 500V AC/minute


Ordering Information:

Unit: $\frac{\text{mm}}{\text{inch}}$

SATA $\frac{P}{1}$ $\frac{07}{2}$ $\frac{V}{3}$ $\frac{0}{4}$ $\frac{0}{5}$ $\frac{0}{6}$

1. Series No
2. S=Socket
P=Plug
3. No. of circuits
4. Type of the connector
V=Straight Type
H=Right Angle Type
M=SMT Type
S=Solder Type
5. Plating:
0=Selective gold flash
J=Selective 15u" gold
K=Selective 30u" gold
6. Special description
0=Standard
S=With shell

Straight Type

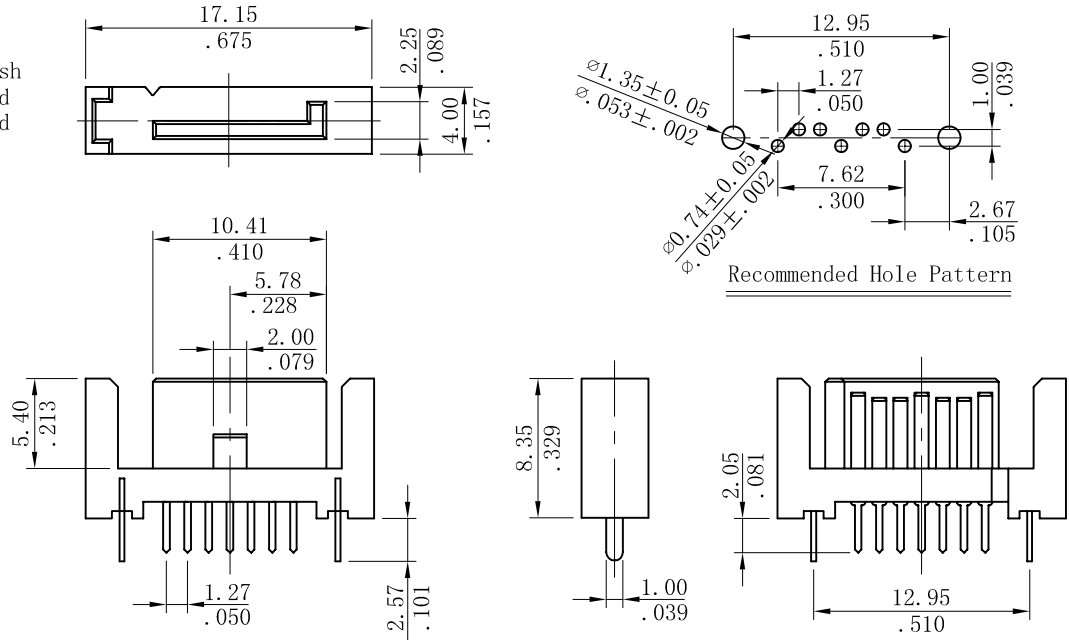

SMT Type

