


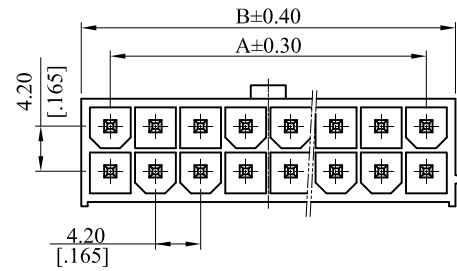


RoHS COMPLIANT

CUSTOMER DRAWING			
REV.	ECO. NO.	DESCRIPTION	DATE
A	DWG. REL.	APPROVED	
F	ES041204		
G	ES070308		
H	ES101211		
I	ES180124	UPDATE	2018.01.25



Recommended P.C.Board Layout

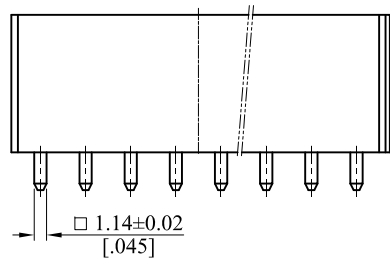

Note:


Material:  
 Insulator: Thermoplastic  
 Contact: Brass

General part number:  
 6745P \*\* V \* 0 \*

- No. of circuits (02~24)
- Plating:  
 0= Tin plated 120µ" min. over 30µ" min. Nickel underplating overall.  
 U= Gold flash over 30µ" min. Nickel underplating overall.  
 W= 15µ" min. Gold over 30µ" min. Nickel underplating overall
- Options:  
 S= UL 94V-2 without screw hole and mounting pegs, with Square Pin, Natural  
 T= UL 94V-0 without screw hole and mounting pegs, with Square Pin, White

A=4.20mm(.165")\*No. of Spaces  
 B=A+5.40mm(.213")

Detail Circuit Pattern Schedule:

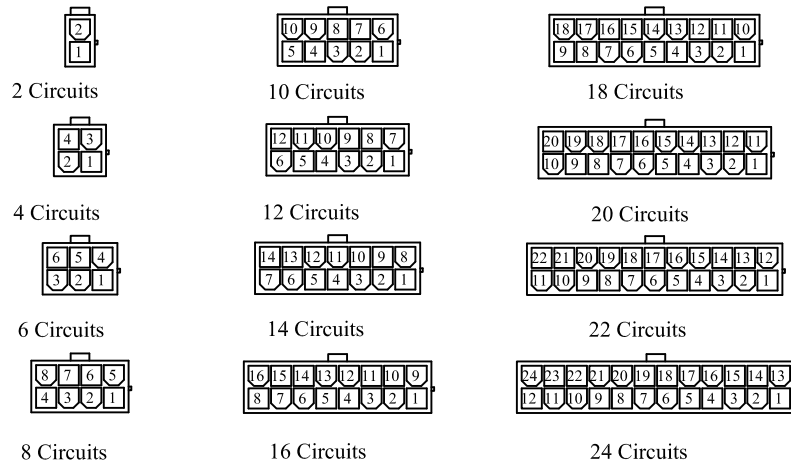

TOLERANCE UNLESS OTHERWISE SPECIFIED			LEOCO CORPORATION <a href="http://www.leoco.com.tw">http://www.leoco.com.tw</a>		
mm [inch]	mm	inch	APPROVED BY:	DATE:	TITLE:
1 PLACE	± 0.30	± --	Chard	2018.01.25	4.2mm Pitch V Type Power Connector
2 PLACES	± 0.20	± .012	Spring	2018.01.25	
3 PLACES	± 0.10	± .008	Angel	2018.01.25	PART NO.:
4 PLACES	± --	± .004			6745P**V*0*
ANGULAR ±1°			SIZE: A3	SCALE: 1:1	DRAWING NO.: 674512S
					REV.: I
					SHEET: 1 OF 1