
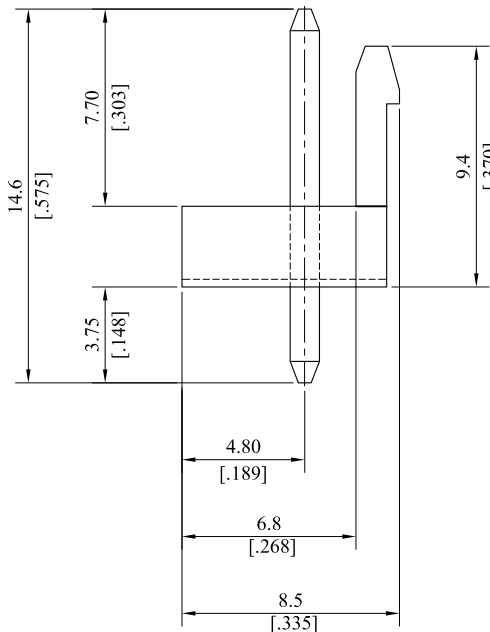


RoHS COMPLIANT

CUSTOMER DRAWING

REV.	ECO. NO.	DESCRIPTION	DATE
F	ES160717	UPDATE PART NO.	2016.7.19
G	ES160911	CHANGE TOLERANCE	2016.9.21
H	ES170728	Modify drawings area B-5 in accordance with the actual products	2017.8.01

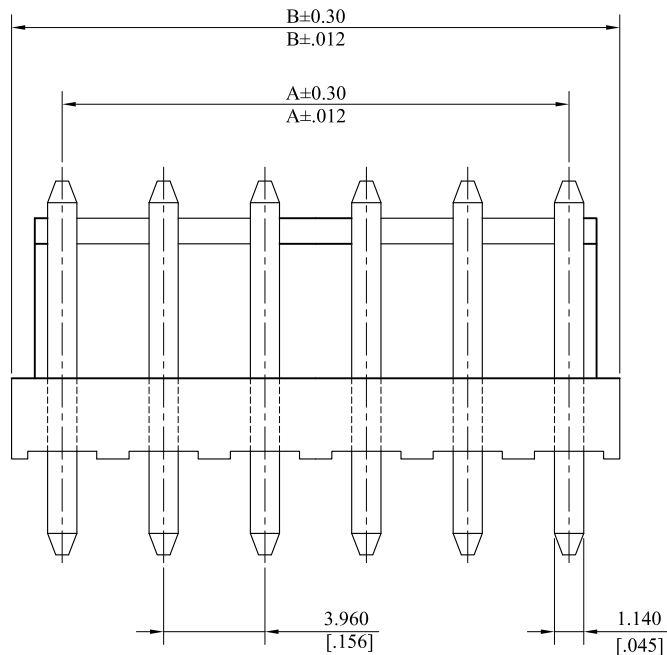

Note:


Material:
 Insulator : Nylon 6/6 ,UL 94V-0
 Contact : Brass

General part number:

3951P ** V 0 0 0
 1 2

- No. of circuits (2~16P)
- 0= Tin plated 120μ " min. over 30μ " min. Nickel underplating overall

A=3.96(.156")xNo. of Spaces
 B=A+3.96(.156")

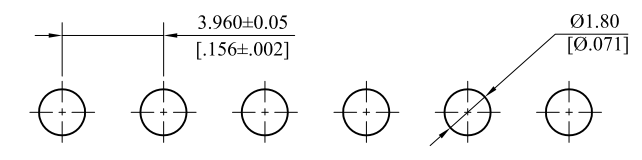

Recommended Hole Pattern

TOLERANCE UNLESS OTHERWISE SPECIFIED			LEOCO CORPORATION http://www.leoco.com.tw	
mm	mm	inch	APPROVED BY:	DATE:
[inch]			Chard	2017.08.01
1 PLACE	± 0.30	± ---	CHECKED BY:	DATE:
2 PLACES	± 0.20	± .012	Angle	2017.08.01
3 PLACES	± 0.10	± .008	DRAWN BY:	DATE:
4 PLACES	± ---	± .004	Brian	2017.08.01
ANGULAR ±1°			SIZE:	SCALE:
			A3	1:1
			TITLE: 3.96mm Pitch Header	
			PART NO.: 3951P**V000	
			DRAWING NO.:	REV.:
			395105S	H
			SHEET:	1 OF 1