

Material:
 Insulator: PBT+20%G.F,UL94V-0,Black
 Contact: Copper Alloy

RoHS COMPLIANT

Ordering information:

2543S** H * 00
 1 2

1. No.of circuits

2. Plating:

T = Tin plated 120u" min. over 30u" min. nickel overall





U = Gold flash over 30u" min. nickel overall

W = 15u" min. gold over 30u" min.nickel overall

Z = 30u" min. gold over 30u" min.nickel overall

A= 2.54mm(.100")xNo.of spaces

B= A+2.94mm(.116)

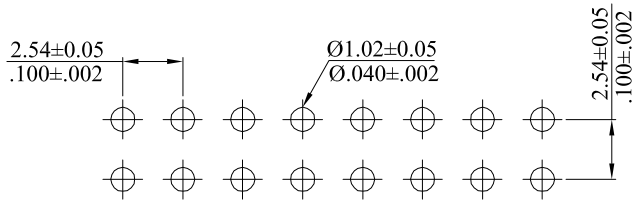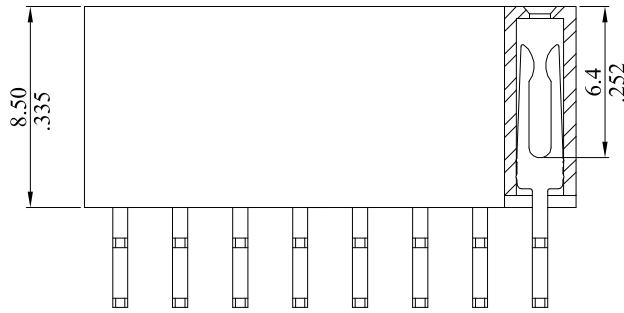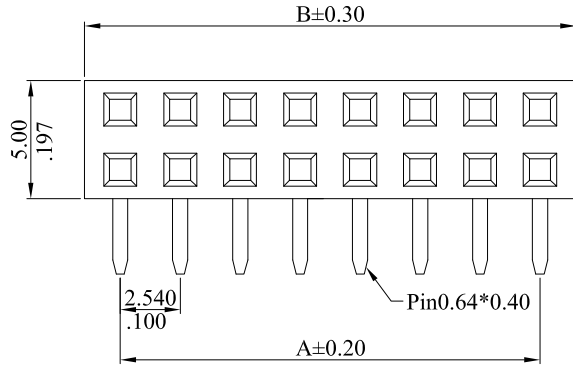

P.C.B LAYOUT

G	ES120425			LEOCO CORPORATION	APPROVED:	PART NO.:																		
F	ES071009				GENERAL TOLERANCES: (UNLESS SPECIFIED)	CHARD DATE:	2543S**H*00																	
E	ES050426			<table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td>1 PLACE</td> <td>± 0.30</td> <td>± --</td> </tr> <tr> <td>2 PLACES</td> <td>± 0.20</td> <td>± .012</td> </tr> <tr> <td>3 PLACES</td> <td>± 0.10</td> <td>± .008</td> </tr> <tr> <td>4 PLACES</td> <td>± --</td> <td>± .004</td> </tr> </tbody> </table>		mm	inch	1 PLACE	± 0.30	± --	2 PLACES	± 0.20	± .012	3 PLACES	± 0.10	± .008	4 PLACES	± --	± .004	CHECKED:	TITLE:			
	mm	inch																						
1 PLACE	± 0.30	± --																						
2 PLACES	± 0.20	± .012																						
3 PLACES	± 0.10	± .008																						
4 PLACES	± --	± .004																						
D	ES990101				SMILE DATE:	SOCKET																		
A	DWG REL				Angel DATE:	DRAWING NO.: 254303S																		
REV.	ECO. NO.	CHG.	APP.	ANGULAR ± (1°)		UNITS mm inch	SCALE	SIZE	SHEET	REV.														
							3:1	A4	1/1	G														